

# Hooked Hanger Sheaves



## Product Summary

- 8" x 26" Wide Hooked Hanger Sheave
- Max Workload: 4,000 lbs
- Total Weight: 65 lbs

## 8" x 26" Hooked Hanger Sheave

The 8" x 26" hooked hanger sheave from Condux is specifically designed for the installation of 1000 MCM EPR cable. While narrow sheaves force cable overlap, the 8-inch width of the Condux sheave allows cables to sit side-by-side in the cradle without funneling cables into a tri-angular configuration. This lets you pull at a higher load, while keeping sidewall bearing pressure under control, ultimately improving cable and personnel safety! Plus, quality Condux manufacturing means years of reliable performance in the field.



Part Number 08042650

**ISO 9001:2000**  
**CERTIFIED**

8" x 26" Hooked Hanger Sheave

**FEATURES AND BENEFITS**

**Construction**

The hooked hanger sheave frame is constructed of lightweight, durable aluminum. The sheave itself features aluminum construction with brass bushings for long life and optimum field performance.

**Design**

A wider 8-inch sheave accommodates cable OD up to 6.3 inches, providing better cable protection by allowing the cable to sit in the cradle configuration.

**Affordability**

The 8" x 26" sheave costs almost 25% less than many standard 5" x 26" hooked hanger sheaves.

**Lightweight**



The new 8" x 26" hooked hanger sheave weighs only 65 lbs!

**Gate Operation**

The improved gate is easier to open and provides a more positive lock when closed.

**Performance & Safety**

With a max load rating of 4,000 lbs, the Condux Hooked Hanger Sheave is load tested to 12,000 lbs providing a 3:1 safety factor!

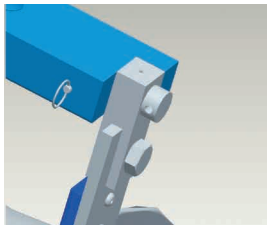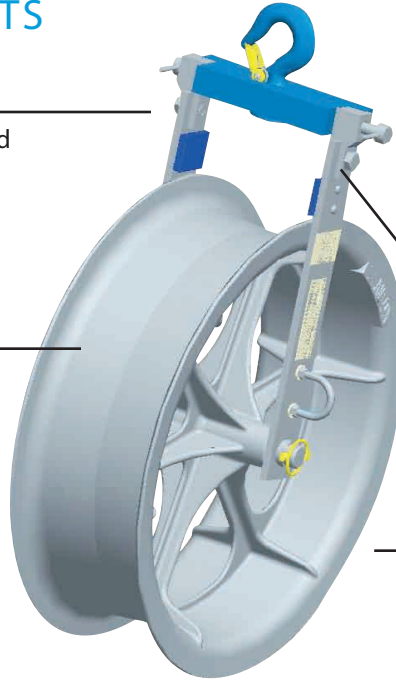

New arm configuration



A wider sheave allows cables to sit side-by-side, keeping sidewall pressures under control, better protecting the cable during installation.

Part Number	Description	Load Rating (lbs)	Max Cable O.D. (in)	Min. Bending Radius (in)	Max Sheave Width (in)	Max Sheave O.D. (in)	Shaft Diameter (in)	Weight (lbs)
08042650	Hooked Hanger Sheave 8" x 26"	4,000	6.30	11.50	8.50	26.00	1.25	65

**Complete Cable Installation Guide**



The 172 page catalog contains over 600 photographs and illustrations depicting a wide range of underground and aerial products and applications. Let Condux make your next cable installation job faster, easier and safer.



**CONDUX INTERNATIONAL, INC.**

145 Kingswood Drive • PO Box 247  
 Mankato, MN 56002-0247 U.S.A.  
 1.507.387.6576 • 1.800.533.2077 (U.S. & Canada)  
 FAX 1.507.387.1442

e-mail: [condxinfo@condux.com](mailto:condxinfo@condux.com) • [www.condux.com](http://www.condux.com)

Available From

